

SPECIFICATIONS


	Input Voltage Range	Output Voltage	Output Current (Cont.)	Current Limiting	Line Regulation	Load Regulation	Output Ripple (Max)	Over-voltage Protection	Efficiency (Typical)	Fuse
ICT2412-10AH (1)(2)(3)	20-30 VDC	13.8 VDC +/- 300 mV	10.0 Amps	10.5 Amps +/- 5%	0.50%	0.40%	40 mV RMS	16.0 VDC	86%	10 Amp
ICT2412-15AH (1)(2)	20-30 VDC	13.8 VDC +/- 300 mV	14.0 Amps	20.5 Amps +/- 5%	0.45%	0.30%	40 mV RMS	16.0 VDC	88%	20 Amp
ICT2412-20AH (1)(2)(3)	20-30 VDC	13.8 VDC +/- 300 mV	20.0 Amps	31.0 Amps +/- 5%	0.45%	0.30%	40 mV RMS	16.0 VDC	95%	35 Amp

NOTE: These converters can be mounted on a standard 19" Rackmount. Please contact us for more information.


(1) CSA C22.2 No 107.1, UL 1012 Approved
 (2) CSA C22.2 No 213, UL 1604 Approved
 (3) Remote ON/OFF Control Version

CONNECTIONS

4 Terminal Type, No Remote Control

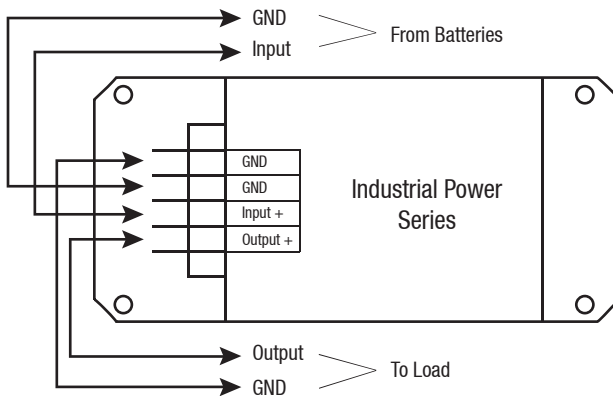

5 Terminal Type, With Remote ON/OFF Control

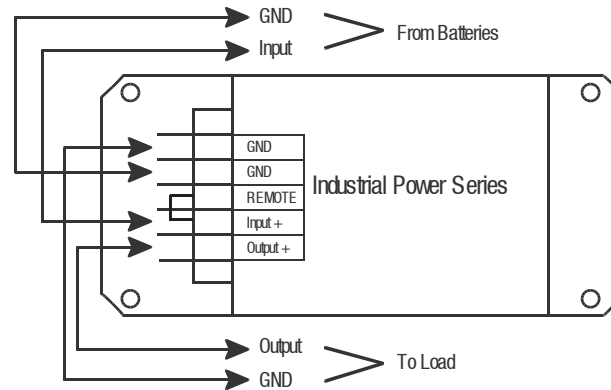

ICT INDUSTRIAL SERIES HAZARDOUS LOCATIONS INSTRUCTION MANUAL



Models:
ICT2412-10AH
ICT2412-15AH
ICT2412-20AH

ICT INDUSTRIAL SERIES

The ICT Industrial Power Series – Hazardous Locations converters are non-isolated DC to DC converters approved for use in hazardous Class 1 Div 2 locations, such as oil fields, chemical and refinery plants. They are designed for use on negative ground systems. Each converter is designed for high efficiency and long service life. The rugged case and modular design have proven durable in harsh environments. Extra silicone is used for vibration and moisture resistance. Standard features include: current limiting, overvoltage protection, fuse protection, high surge capacity, easy access mounting holes, and a terminal block connector.

These instructions should be read before using the product and saved for future reference.

SETUP

- ▶ Mount converter securely.
- ▶ Do not apply power until unit is completely wired.
- ▶ For best results, wire converter directly to battery using heavy gauge wire with in line fuse.
- ▶ NOTE: Do not wire output directly to a power source. Paralleling outputs are not recommended. Please contact technical support for application assistance.

TROUBLESHOOTING

- ▶ Check fuse inside unit, if blown, replace with same type and rating fuse.
- ▶ Check for proper voltage at input while converter is under load.
- ▶ Ensure the Remote ON/OFF pin is connected to the V+ input on 5 terminal models.

WARNING

- ▶ THIS EQUIPMENT IS SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C & D OR NON-HAZARDOUS LOCATIONS ONLY.
- ▶ **EXPLOSION HAZARD:** Substitution of components may impair suitability for class 1 division 2.
- ▶ **EXPLOSION HAZARD:** Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.
- ▶ **EXPLOSION HAZARD:** Do not replace fuse unless power has been switched off or the area is known to be non-hazardous.
- ▶ **RISQUE D'EXPLOSION:** La substitution de composants peut rendre ce matériel inacceptable pour les emplacements de classe 1 division 2.
- ▶ **RISQUE D'EXPLOSION:** Couper le courant ou s'assurer que l'emplacement est designe non dangereux avant de remplacer le fuse.
- ▶ **RISQUE D'EXPLOSION:** Avant de deconnecter l'equipement, couper le courant ou s'assurer que l'emplacement est designe non dangereux.

LIMITED WARRANTY

ICT Limited Warranty is only intended for the benefit of the original Purchaser of this product. This Warranty is not transferable or assignable without the prior written permission of ICT. ICT's sole obligation and liability under this warranty is limited to either repairing or replacing defective products at the sole discretion of ICT. When repairing or replacing the products, ICT may use products or parts that are new, equivalent to new or re-conditioned. Parts repaired or replaced during the warranty period will be under warranty for the remainder of the warranty period.

The warranty period on ICT products purchased new from ICT is two years. The warranty period for a repaired product or part thereof is ninety (90) days or the remainder of the unexpired term of the new product warranty period, whichever is greater. Repair or replacement of a defective product or part does not extend the original warranty coverage period.

No claim will be accepted unless written notice of the claim is received by ICT in accordance with ICT's Return Material Authorization (RMA) procedure, as soon as reasonably possible after the defect is discovered. A valid product serial number must be provided with the RMA claim to prove eligibility. The RMA form is available on the ICT website at www.ict-power.com/support/warranty-repair/.

The Purchaser shall at their own risk and cost return the defective product to ICT's factory or designated repair center once an RMA is issued by ICT. Return of the products to the customer after repair is completed shall be prepaid by ICT unless otherwise mutually agreed between the parties. Products shipped to ICT which have incurred freight damage will not be covered by this Warranty and any repairs or replacement parts, components or products needed will be invoiced in the full current price amount and returned freight collect to Purchaser. It is the Purchaser's responsibility to check the product upon receipt for any damage during shipping and to contact the carrier or shipper regarding such damage. Product that is returned as defective, which is determined to operate within published specifications will be returned to the Purchaser freight collect.

This Warranty will be void if the product has been subjected to misuse, neglect, accident, exposure to environmental conditions not conforming to the products' limits of operation, improper installation or maintenance, improper use of an electrical source, defects caused by sharp items or by impact pressure, a force majeure event, has been modified or repaired by anyone other than ICT or its authorized representative, has been subjected to unreasonable physical, thermal or electrical stress, improper maintenance, or causes external to the unit including but not limited to general environmental conditions such as rust, corrosive atmospheres, sustained temperatures outside the specified operating range of the equipment, exposure to power surges and/or electrical surges, improper grounding, mould or dust, animal or insect damage, water damage or immersion in liquid of any kind.

ICT does not control the installation and use of any ICT product. Accordingly, it is understood this does not constitute a warranty of performance or a warranty of fitness for a particular purpose.

