B 0



4050 Transporter - Rapid Deployment Package (RDP)

The Barrett 4050 Transporter (P/N: BC405055) combines Barrett 4050 HF radio equipment into an easily transportable rugged Pelican 1606 case allowing the system to be field operational in minutes. There is no longer a need for time-consuming unpacking, connecting and organizing that can be impractical in emergency situations. Instead, simply attach the appropriate antenna and the Barrett 4050 Transporter is HF transmission ready. The system can be powered by the internal DC battery or internal AC mains power supply which is also the battery charger.

Features

- Pelican Air Case 1606 (Exterior size: $69.6 \times 38.4 \times 30$ cm)
- Barrett 4050 HF SDR Transceiver (internal fit)
- Barrett 4050 Transceiver Control Handset
- Barrett 4022 Power Supply (internal fit)
- **6** Built in Speaker
- 6 Internal 22Ah Battery (Optional AGM/SLA or LiFEPO4)
- **1** DVP-200 Data and Voice Privacy Unit (optional internal fit)
- Optional Barrett 4045 Automatic Antenna Tuner (pictured), or tactical broadband dipole
- Battery Isolator Switch and Charge Indicator
- USB
- DB-25 Accessory Connection
- Coaxial Connection
- **B** GPS Connection
- ATU Connection
- AUX Control Head Connection
- IP/Ethernet
- AC Mains Input
- Earth/Ground
- Receded Connection Panel with IP67 Door (secures with turn screws)

4050 Transporter Weight


4050 Transporter (wheeled) Case with 4050 Transceiver & PSU - 19.6kg

4050 Transporter (wheeled) Case with 4050 Transceiver PSU & - 22.2kg 22Ah LiFEPo4 Battery

4050 Transporter (wheeled) Case with 4050 Transceiver PSU & - 26.5kg 22Ah Sealed Lead Acid Battery

Option weights

Barrett 4045 Automatic HF Antenna Tuner	- 3.2kg
Long wire throw out antenna	- 0.3kg
Counterpoise earth kit - single wire	- 0.25kg
Rapid deployment broadband dipole antenna	- 2.2kg

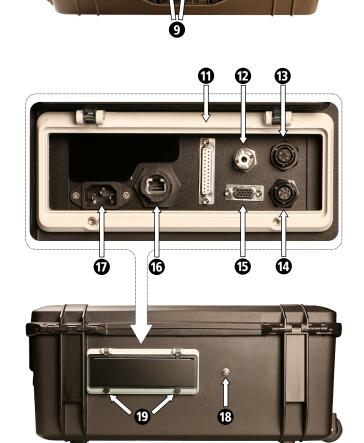

Head Office

Barrett Communications Pty Ltd 47 Discovery Drive, Bibra Lake, WA, 6163 AUSTRALIA Tel: +61 8 9434 1700 information@barrettcomms.com

